



Pikes Peak Chapter

The Construction Specifications Institute



March, 2017

Volume 48, No 6

This Month's Program:

Masonry Through-Wall Flashings Wednesday, March 22

AN AIA ACCREDITED PROGRAM

Program Topics:

- Product Selection
- Proper Flashing Detailing
- Installation Procedures
- Assurance to the designer and owner of the veneer system's ability to deflect moisture penetration

SPEAKER BIO: Bret Terry, Rocky Mountain Masonry Institute

Bret is the current Technical and Executive Director of the Rocky Mountain Masonry Institute (RMMI) and his background is in both commercial masonry and luxury home masonry construction since 1977. Bret has worked as a mason tender, a mason, an estimator, a project manager, and a masonry contractor.



Date: Wednesday, March 22, 2017

Time: 11:30 a.m. to 1:00 p.m.

Southside Johnny's
528 S. Tejon Street
Colorado Springs, CO 80903

No cost to Pikes Peak Chapter
members

Please RSVP at
www.pikespeakcsi.org
by noon on
Monday, March 20

RMMI was established in 1995 to provide education, certification, architectural and engineering presentations, and technical services to its members and the design community. It is a consortium of Colorado area brick, concrete block, and pre-blended mortar manufacturers along with masonry contractors, masonry material suppliers, and professional affiliates.



March is a busy month for us here at Pikes Peak Chapter CSI! We have our tour of the Ent Performing Arts Center coming up on the 15th, and Bret Terry from the Rocky Mountain Masonry Institute will be our presenter at the chapter meeting on March 22. I know this month is very busy for families with children who will be out of school for spring break but hope you will have the time to join us for both of these great events.

We will have ballots available for our open board positions this month as well. I am so excited about our members that have decided to step up and join the board! If you were not one of the members who made the decision to join us and serve on the board this year, please consider it for the future. While serving on the board may take a few more of your hours each month, the rewards greatly outweigh the time spent. I have learned so much about CSI, Pikes Peak Chapter CSI and our members and guests by serving on the board and look forward to continuing to serve next year, supporting Rob Hixon as next year's President.

We have had some unfortunate news this week that I want to share with you all. Southside Johnny's will be closing at the end of March. We will have the option of staying in Johnny Nolan's family of restaurants by moving to the Navajo Hogan or Johnny's new restaurant, The Tap Room. Our end of year networking/mini product show meeting in May is already scheduled for the Navajo Hogan, and we will be working closely with the restaurant staff to schedule our April meeting at one of the other restaurants. While we work through the remainder of this year's meetings, we would like to have input from our members on other options for next year's meetings. We will have a question on our website that you can answer on this topic when you register for the April meeting, but please feel free to email any of us on the board if you have comments or suggestions before then.

On the subject of our May meeting, I want to remind everyone that we have some open slots for additional vendors. If you are interested in a table to display your company's products or services, please contact Shane David for additional information. Members are eligible for special rates that are extremely reasonable, and all fees associated with this event support our Herald R. Holding Scholarship for Pikes Peak Community College.

Thank you all for your continued membership in our Chapter. I look forward to seeing you all soon!

Joni Zimmerman, CSI Pikes Peak Chapter President

See Page 7 for more info on Spring Education Exams
Spring 2017 Dates

Final Registration: Feb 28—March 14

Interested in Advertising on our new Website?

Our website committee has been working very hard and we are now ready to start accepting sponsors and advertisers for our website!! For a very reasonable fee, we will place your company's logo and a link to your website on our homepage so that everyone that visits the site will have the opportunity to see that you are a PPCSI sponsor and can click the link to visit your website. This is a great way to get exposure to our members and guests for your company. If you are interested, please contact any board members for additional information.



Be on the lookout for an email regarding the location of the April Luncheon. Southside Johnny's is closing after our March meeting.



Architectural LINKS

Construction Specifications

Gregg Voos

Registered Architect, CSI

719.231.4235 office

719.594.4711 fax

PO Box 7267 Colorado Springs, CO 80933-7267

gtvs@msn.com



Thomas J. Kapels, AIA, ASLA
LEED Green Associate

Architect / Landscape Architect
President, Owner



719-325-9303 (cell)

tkapels@tk-architecture.com

Dear CSI Colleagues,

The Institute Ballots will be out soon and I encourage you first and foremost to vote in this election for officers on our national board of directors.

Secondly, the nominating committee has done a great job slotting three candidates for each open position. Myself, along with Bill DuBois out of central NJ and JW Mollohan, formerly of KC and now Atlanta, are on your list of candidates running for Institute Secretary.

We are all very qualified - having served or currently serving on the national board of directors at CSI. All of us can offer continuity with new policy governance adoption, which at this juncture is key to our future success as an organization and working closer with Staff and our Executive Director.

I'd like to say I'm more qualified, but in honesty, we all share many years of experience and a common passion for CSI. I think the difference is having just a little more passion to speak up for positive changes that CSI needs to be successful in the years ahead. My experience includes serving 2 regions, several chapters and at the institute on the national level. This also includes active participation with several institute committees and task teams during my 20 year tenure in CSI leadership. I'm confident we are going to need thought-leaders who will also work hard to accomplish the challenges ahead for CSI. I am seeking your support and vote for institute secretary in the weeks ahead.

Please read the candidate statements at www.csiresources.org and make sure to vote!

Thank you for your support!!

Anne M Roeper

Anne Roeper, CSI, CCPR

ROXUL Architectural Manager

C 740-627-6071

E anne.roeper@roxul.com





**ART C. KLEIN
CONSTRUCTION, INC.**

design • construction
custom residential • commercial

(719) 570-6060

3370 Chelton Loop So. • Colorado Springs, CO • 80909 • Fax (719) 570-9671
www.ackconstruction.com

Bruce W. Barr, AIA

Architect, LEED® AP

Mobile: (719) 499-1989

E-Mail: bbarr@ackconstruction.com

HCDA

HCDA ENGINEERING, INC.
STRUCTURAL CONSULTANTS

Andrew B. Baturevich, P.E.

545 E. PIKES PEAK AVE., SUITE 100
COLORADO SPRINGS, CO 80903
abaturevich@hcdaengineering.com

(719) 633-7784
FAX (719) 471-3173



**PROFESSIONAL RESTORATION
& REPAIR**

STRUCTURAL & COSMETIC REPAIRS
ON
CONCRETE, MASONRY & WOOD

CRAIG L. NELSON, CDT, CSI

P.O. Box 38932 Colorado Springs, CO 80937
(719) 632-3996 • FAX: (719) 632-3997

WEB: pro-restoration-repair.com



SPECIFICATIONS CONSULTANTS

**PAUL DeARMENT, P.E., CCS, CSI, SCIP
PRINCIPAL**

p.o. box 3010
colorado springs, colorado 80934
pdeament@specscons.com

(719) 577-9414 ofc
(719) 623-0172 fax
(719) 651-7734 cell

**IF YOU'RE ORGANIZATION WOULD LIKE TO ADVERTISE
YOUR BUSINESS OR UPCOMING EVENTS IN
THE INTENT, PLEASE
CONTACT ANDY BATUREVICH AT
ABATUREVICH@HCDAENGINEERING.COM OR
719-633-7784**

Upcoming Program Dates

**Folks, please make sure to mark your calendars for the following
dates and join us for our Monthly Meetings!**

Wednesday, March 15, 2017 Special Tour

Wednesday, April 26, 2017

Wednesday, May 24, 2017

CSI Certificate/Certification Program

CSI is the construction community's authority on communication and construction documentation.

Through CSI's Certificate/Certification Program, you can develop a conceptual understanding of the entire construction process and concrete skills in:

- Construction documentation development and administration
- Specification writing and enforcement
- Product research and sourcing
- Communication with the design and contracting teams

CDT

CSI's Construction Documents Technologist (**CDT**) program has provided foundation training in construction documentation for architects, contractors, contract administrators, specifiers, and manufacturers' representatives for decades. As the cornerstone of CSI's certification program, it's also prerequisite to CSI's advanced certification exams.

Getting your CDT means:

- Understanding how a project unfolds from conception to delivery
- Understanding the documentation involved

CCCA

A CSI Certified Construction Contract Administrator (**CCCA**) develops, administers and enforces construction documentation.

Getting your CCCA means:

- Developing an in-depth understanding of quality assurance and quality control
- Having advanced skills in bidding and negotiating procedures
- Developing skills in construction observation and inspection
- Understanding Division 01, General and Supplemental Conditions, agreements, and all other documents related to the project
- Understanding enforcement and liability

CCS

A CSI Certified Construction Specifier (**CCS**) is a skilled product researcher who knows how to investigate and identify cost-effective, efficient solutions, and then communicate those solutions through the specifications.

Getting your CCS means:

- Developing an in-depth understanding of agreements, conditions of the contract, Division 01, and their relationships to specifications
- Having advanced skills in specification development, enabling you to write specs and use spec-writing software more effectively
- Understanding how to research and source products

CCPR

A Certified Construction Product Representative (**CCPR**) is a trusted advisor, a valued resource called upon by the design team again and again.

Getting your CCPR means:

- Making sales calls, presentations, construction meetings, and product shows more effective
- Knowing the parts of construction product marketing collateral that are of most interest to designers and contractors
- Understanding roles and responsibilities of everyone involved in the project, and how and when to communicate with them
- Understanding all phases of the construction documentation, and your role in each phase
- Speaking the same language as the design and contractor teams

Learn more, or register for an exam at CSIResources.org.



Building Construction Knowledge & Leadership in the Southwest

**CSI SOUTHWEST REGION
EDUCATION CONFERENCE**



APRIL 20 - 22, 2017

Lodge on the Desert, Tucson, AZ



EDUCATION from EXPERTS

- CONSTRUCTION DOCUMENTS ED
- SPECS 101
- SUBMITTALS & SUBSTITUTIONS
- BUILDING CODES
- CCPR FOR YOUR PROJECTS
- PRESENTATION SKILLS
- LEADERSHIP TRAINING



Visit www.csisouthwestregion.org for sponsor info and attendee registration, starting Jan. 16, 2017



STRESSCON
Architectural and Structural Precast Concrete
An EwCor Company

Robert D. Hixon
Pre-Construction Services

3210 ASTROZON BOULEVARD
COLORADO SPRINGS, CO 80910

PHONE: **719-390-5041**
DENVER LINE: 303-623-1323
FAX: 719-390-5564
CELL: 719-205-4700
E-MAIL: rhixon@stresscon.com



Shane David
CSI, CDT
sdavid@hlarch.com
d: 303.298.4808

H+L Architecture
219 E. Colorado Ave
Colorado Springs, CO 80903
www.hlarch.com | 719.578.9317

shaping space . shaping lives.



CSI
Pikes Peak Chapter



CSI Pikes Peak Chapter
would like to thank
Rob Haddock

for agreeing to include his award winning seven part article series on metal roofing in the *Intent* each month. The article series won the Carl G. Cash Award from ASTM D 08 Committee on roofing and waterproofing. Part 6 of the series is included at the end of this newsletter.



Pikes Peak Chapter

President:

Joni A. Zimmerman CSI, CDT
TK-Architecture, LLC
719-393-2987

President-Elect:

Rob Hixon, CSI
Stresscon
719.390.5041

Vice-President:

Manny Mungaray
GCC of America
720-579-6288

Secretary:

Luke Bleichrodt CSI
RW Specialties
303-880-5584

Treasurer:

Larry W. Gilland, CSI, CDT, LEED AP
LGA Studios
719.635.0880

Past President:

Shane David, CSI, CDT
H+L Architecture
303.298.4808

Directors:

Charlie Lengal III,
QCP, CxA, CPD, CCA
M-E Engineers, Inc.
719.536.0036

Bob Stanton, CSI, CDT
Stanton Construction Co.
719.471.7891

Ben Pollock, CSI
Webb Design
719.344.8350

Greg Gulliksen, CSI, CDT, AIA
CSNA Architects
719.473.7225

Bruce W. Barr, CSI, AIA, LEED AP
Art C. Klein Construction, Inc.
719.570.6060

WHITE PAPER



Part 6: Metal Roofing From A (Aluminum) to Z (Zinc)

Attachment of Metal Panels

In this article, we look at panel attachment and how it provides the necessary wind resistance while still allowing panels to respond to thermal loads. We also look at “panel pinning”— where, why and how it is done.

Wind Effects and Standards

Metal panels that comprise the finished surface of a roof constitute an airfoil of sorts. As wind buffets the walls of the building, it is redirected up and over the roof. As this happens, negative pressure (suction) is created over certain zones of the roof surface, producing “lift” or “uplift”. This is the same dynamic that makes airplanes fly and the effect can be quite exaggerated, threatening to tear the roof from its mounting. The frequency and strength of the metal panels’ attachment, therefore, can be vital to roof survival during a windstorm.

Wind is measured by its speed in mph, but those units of measurement are not useful for designing


structures and roofs. The forces that are exerted on the roof surface are determined by taking the highest historical wind speed and translating it into pounds of positive or negative pressure per square foot of roof surface. The more concerning of the two is the negative pressure (uplift). The translation of wind speed into pounds of uplift force involves a number of tables, equations and a matrix of variables that include the height of the building and other size factors, as well as the “exposure factor” from the effects of the surrounding terrain or nearby buildings, all of which can increase or diminish wind pressures at the roof.

The metal roof assembly is a load chain in essence, with the weakest link representing the point of failure.

The National Weather Service maps maximum wind speeds from empirical data recorded over years of time for all areas of the country. Although the instrumentation (called an anemometer) measures wind speed at 33 feet above the ground, that speed is generally referenced as “ground wind speed.” The ASCE-7.02 design standard is the most widely accepted engineering standard to take the recorded maximum ground wind speed in mph and determine the relative effects of the variables mentioned above to translate it into pounds per square foot (psf) on the roof surface. Note: As a result of increased hurricane severity over the last several decades, the mapping of recorded maximum wind speeds has changed.




▲ An ASTM E 1592 test bed showing a 16-inch horizontal seam panel system pressurized to 126 psf using S-5 WindClamps™ at panel clip locations. The assembly failed at 220 psf. The failure pressure without seam reinforcement was 110 psf.

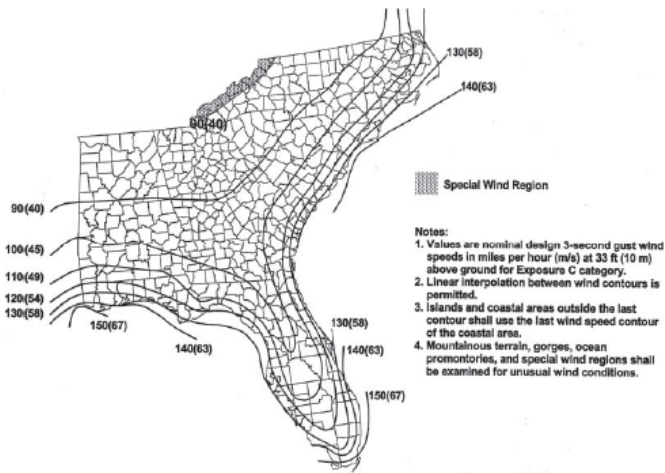

▲ Design begins with the fastest 3-second gust as measured on the ground. “On the ground” means 33 feet above and lower. Because of ground friction, as building heights increase, wind speeds also increase; hence, a roof on a 100-foot-tall building will experience more severe wind effects than 1-story construction will. For related reasons, surrounding construction and topography also play a role, resulting in different “exposures.”

The ASCE standard divides the roof into “zones”, each of which will experience different uplift forces resulting from the same ground wind speed. Corner zones are where the wind effects are the greatest. Perimeters are next along with ridges on steeply sloped roofs.

The “field” (non-perimeter zone) of the roof is where wind uplift effects are the least. The dimensional size of each zone is determined by the building size and height. Once these design pressures are known, the ability of the panel system to resist them must be proven.

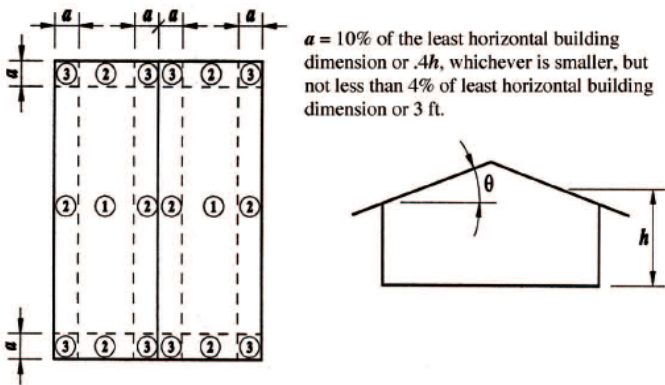

▲ Zones 1, 2 and 3 each have pressure coefficients that vary with other aspects of the structure. Zone 3 experiences the greatest pressures; Zone 1 the least. Zones near the ridge are nonexistent when the slope is below 7 degrees.

The resistance of panels and attachments to the uplift forces to which they will be exposed is calculated or tested. Most design parameters and specifications require testing rather than structural engineering calculation.

Wind Testing

Recognized test methods include Underwriters Laboratories UL 580, Factory Mutual 4471 and ASTM E1592. Most codes and standards recognize that these test methods are superseded by actual “wind tunnel” testing as the wind tunnel more accurately assimilates actual building geometries, wind speeds and the resulting wind effects on the roof. Why not simply require wind tunnel testing as a standard practice? The answer is cost. Wind tunnel studies are extremely expensive and each is specific to an individual building and roof geometry.

The named tests use various methods of inducing static pressure on the roof assemblies in an attempt to quantify their performance. Most of them are designed and intended for structural panels (panels installed over open support framing). In my opinion, they generally produce conservative results compared to the real-world effects of wind on a roof surface. This has to do with conservatism within the design standard and test methods, as well as the inability of any test to replicate the unusual “microbursts” that wind produces on a surface as opposed to prolonged sustained pressures.

Some testing at Mississippi State University™ using electromagnetic fields rather than air pressure get closer to the real effects of wind on structural metal panels; however, testing of this type is also too costly to be adopted as an industry-wide procedure. The effects of wind on a roof surface, which is installed over a deck, is known to be mitigated to some degree, but the industry tests noted here cannot reflect this and indeed some of them do not enable testing of these “non-structural” panels.



▲ Research funded by the Metal Building Manufacturers Association and American Iron and Steel Institute at Mississippi State University utilized electromagnetic fields to more accurately replicate the effects of wind on a roof surface. *Photo courtesy of the Metal Building Manufacturers Association.*


Because each test is very specific in terms of the material and assembly particulars, a manufacturer testing a new roof product may have to go through a battery of tests for each panel assembly that it wishes to market. This can mean dozens of tests costing thousands of dollars each. Such repetition is necessary, however, because there are many variables in actual assemblies. Those variables include the gauge and mechanical properties of the material, the geometric shape of the seam and profile, the dimensions of the seam, the strength of the clip or other attachment, the attachment frequency and the width of the panel. The metal roof assembly is a load chain, in essence, with the weakest link representing the point of failure.

Changing one of the variables means increasing or decreasing the strength of one of the links. But doubling the strength of one link does not necessarily double the strength of the chain—the failure point may just move to a different link. Frequently, the weakest link is that the panel seam unravels under pressure or lifts off the attachment clip. These

modes of failure can be strengthened by the use of external seam reinforcing, such as S-5 WindClamps™, at or between clip locations, often doubling the system’s uplift resistance at very low costs.



▲ Solar installation mounted parallel to the angle of the roof can mitigate wind effects.

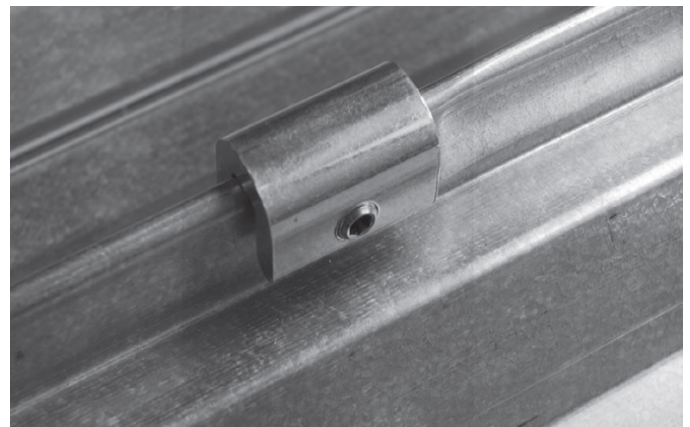

▲ S-5! WindClamp™ shown on seam.


It should be pointed out that roof-mounted ancillary items, like solar collectors that are a few inches above but planar to the roof, are not subject to the same wind pressures as the roof itself. In fact, they also have a mitigating effect on the pressures on the roof. Because the solar collector is a much smaller area than a roof, with air gaps at its edges that promote “leakage,” a lesser amount of suction is exerted on its surface than on the plane of the

roof. Using the same design standards for such ancillaries will produce very conservative results indeed. Conversely, if the collector is mounted with some angle of tilt, the wind dynamic can be considerably more extreme.

Panel Attachment

Panels are attached with exposed or concealed fastenings. Exposed fasteners are used for certain panel types, including ribbed and corrugated profiles. This “direct” method of attachment can provide increased wind resistance but does not provide for thermal movement of panels and has the obvious disadvantage of penetrating the weathering surface.

Such methods and systems must be utilized with some precaution for these reasons. When the structure to which they are attached consists of wood or steel purlins, thermal cycling is relieved to some extent by flexure or rotation of the purlins.

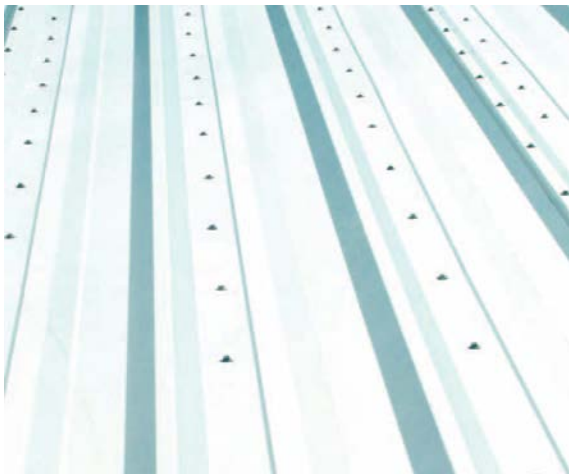

▲ Through-fastened panels can provide greater wind resistance simply by increasing the fastening frequency, but this direct attachment does not provide very well for thermal response of the panels and adds holes to the weathering surface.

When the same systems are used over solid wood decks or bridged bar joists, however, fastening fatigue can result from repeated thermal cycling. It may, therefore, be a good idea to limit roof lengths for such applications because thermal movement is directly related to length.

Hundreds of years ago, brake-formed shapes were all fix-cleated to the structure, but their end-to-end joining was done with loose locks, and panel lengths were short, so thermal movement was never accumulated. Now, with roll forming manufacturing methods, panels have gotten considerably longer and thus accumulate more movement.

Most (not all) “concealed fastening” provides for differential thermal movement of panels to structure by the interface of the clip with the panel. A simple clip design would have this interface be a frictional engagement wherein the clip is rigidly attached to the building structure but slip-connected to the male seam component of the panel. This (one-piece) clip method is quite popular with most steep-slope roof products and especially those that have “snap-together” seam types. The clip is stationary but allows for differential movement between panel and clip.




▲ Concealed fastened panels eliminate most fasteners from the weathering surface by using attachment clips inside the side-seam joint. The clips permit thermal movement, but because the “flat” of the panel is unrestrained, wind resistance is diminished. Under excessive load, the panel flat arcs upward, rotating the seam and disjoining.

When sealants are used within a panel seam, oftentimes the one-piece clip design cannot work. This is because the differential movement between

the panel and clip would abrade the sealant, jeopardizing weather integrity of the seam.

In such cases, a different clip design must be employed. The most popular designs for such a seam involve dual-component clips. The clip base is attached rigidly to the structure and the clip top folds into the panel seam. Differential movement then takes place within the clip itself, between its two components—base and top. It bears mentioning that the clip is an integral part of the assembly and unique in most cases to the panel profile with which it is used.

Calculating Drag Loads

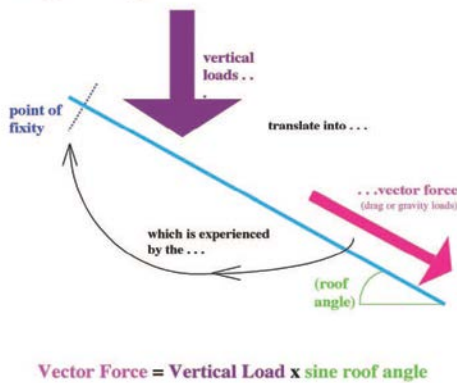

Panel Fixity


Using clip fastenings that allow the panel to cycle freely in response to thermal loads also make it necessary to deliberately “pin” or “fix” the panel at some point along its length to prevent it from migrating out of its intended location. Gravity loads, or “drag loads” as they are sometimes called, will act in a direction parallel to the roof’s surface trying to pull the panel down the slope of the roof. These loads are primarily comprised of vertical loads (snow, wind, foot traffic, etc.) on the roof’s surface. The only resistance to these loads (other than the panels’ designed point of fixity) is friction between panel and structure.

Panel fixity can be accomplished by using one or more “fixed clips,” or by some method of direct panel fastening at the desired location. Use of the fixed clip method depends upon the nature of the interface of clip to panel seam; with some designs it is not possible.


The location of choice for fixity of steeply sloped architectural systems is most often at the ridge where direct (or through) fastenings can be hidden beneath a ridge cover. The system will then accumulate movement to its eave end.

Conversely, the popular point of fixity for low-slope systems is at the eave. The primary reason for this preference is that such systems are often hydrostatic by design, and it is much easier to waterproof a joint that is stationary than one that is moving. Exposed fastening is usually tolerable from an aesthetic standpoint on low-slope systems, so it is a logical choice. Such a system will then accumulate thermal movement to the ridge where a “bellows” style ridge flashing can accommodate differential movement of the two opposing roof planes while maintaining a hydrostatic seal.

SLOPE (12)	DEGREES	SINE
1	4° 45'	0.08281
2	9° 28'	0.16447
3	15°	0.25982
4	18° 30'	0.3173
5	22° 30'	0.38268
6	26° 30'	0.4462
7	30° 15'	0.50377
8	33° 45'	0.55557
9	36° 45'	0.59832
10	39° 45'	0.63944
11	42° 30'	0.67558
12	45°	0.70711

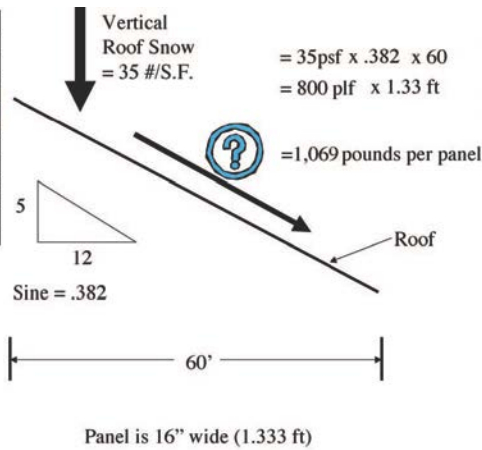

▲ Drag loads should be calculated to verify adequacy of the panels’ method and frequency of fixidity. In this example, the fixidity point should resist 1,069 pounds for each panel (plus safety factors).

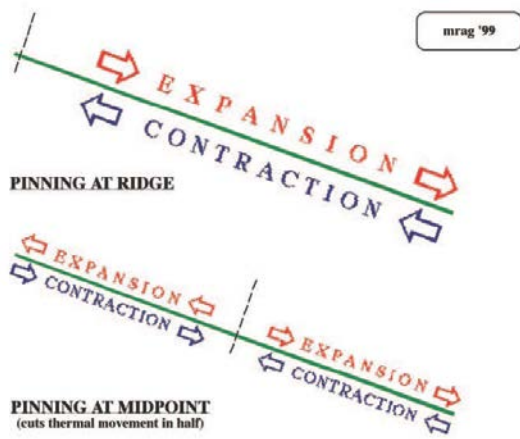


▲ The point of fixity may be at the ridge, eave or some midpoint. It is crucial that this point is singular and “dual pinning” does not occur.

These statements are not meant to be exclusive; there are exceptions in both cases. It is also occasioned in design to see a panel fixed at its midpoint, dividing thermal movement in half by sending it in both directions rather than one.

Having chosen a point of fixity for the metal panel system, it then becomes critical to ensure that such a point is singular. In other words, the panel should not be pinned inadvertently at any other point along its length. To do so would likely produce a failure from the thermal loads. On occasion, the thermal movement integrity of a roof system is violated because some construction detail or roof accessory mounting did not preserve this characteristic. Design and as-built construction should be scrutinized in this regard. A fascia break detail, for example, fixes the panel at the point of the break; to fix it again at its opposite end would constitute dual pinning. Other examples will be discussed in the next segment.

How Does Thermal Movement Occur?

As metal panels get hot, they expand, increasing their length dimension. When they get cold, they contract, reducing that dimension. This cyclical changing of dimension is called thermal movement. This is a linear effect. In other words, it will

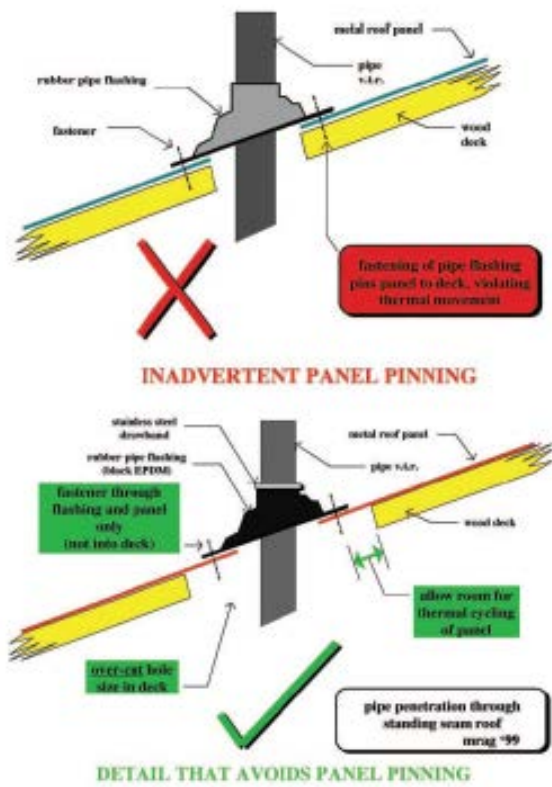

▲ Often when a pipe is flashed through a steep roof product over a deck, it results in panel fixity. To avoid this, the deck should be overcut as shown.

accumulate in direct proportion to the panels’ “unbroken” length. If panels sections are joined end-to-end with mechanical fasteners through the lap, then the unbroken length is the total length of two or more panels, not just one.

Thermal movement does not accumulate across the width of the panels because the unbroken length in that axis is so small. The geometry of the panels and their joining method at side joints allows flexure at each joint so the thermal effects never accumulate. Small, unitized metal covering products, like shingles, in like fashion minimize unbroken length dimensions; hence thermal movement is rarely a consideration for such systems.



▲ In early days of metal roofing, pan lengths were short, so thermal movement never accumulated. As the “unbroken length” of panels increases, so does the dimensional gain or loss caused by surface temperatures.

Total (or worst-case) thermal movement is calculated by extending the material’s coefficient of expansion over its length and the anticipated in-service temperature range throughout its service life. It is the surface temperature of the material and *not ambient air* that affects these extremes.

The maximum high-end temperature will be conditioned by the color of the panel and its solar absorption characteristics (lighter colors and high-gloss finishes will be cooler than dark colors and low-gloss finishes). A dark-colored panel with low gloss at right angles to the summer sun can approach temperatures of 200 F. Use of “cool” (or reflective) pigments can reduce these temperatures significantly because they lower the solar absorption.

A single metal panel exerts forces measured in tons when it tries to move thermally; hence, undue restriction of this anticipated movement easily can precipitate attachment fatigue and failure.

In cold winter nighttime scenarios, the low extremes of surface temperature can actually dip 25 or 30 degrees below ambient air. This is because of the principles of radiant energy. Skyward-facing objects radiate heat energy to the night sky. As this energy transfer occurs, the material loses BTU’s (heat), reducing its temperature. It is this same effect that results in dew or frost on the ground, roof or windshield of your car when vertical surfaces do not experience dew or frost. It is a combination of these factors that can result in ΔT (difference of hottest to coldest surface temperatures) figures of close to 250 F in cold northern climates.

T-high is the hottest surface temperature (not ambient air)

ΔT is T-high minus T-low

T-low is the coldest surface temperature (ambient minus 25°F)

C ^e	steel	=	6.7 x 10 ⁻⁶	
	aluminum		12.9 x 10 ⁻⁶	
	copper		9.4 x 10 ⁻⁶	
	stainless		9.6 x 10 ⁻⁶	
	terne		6.7 x 10 ⁻⁶	
	lead		16.4 x 10 ⁻⁶	(inches per inch per °F)


ΔL = L x ΔT x C^e

length change = length x temperature change x coefficient of expansion


mrag '99

▲ Different metals have different expansion coefficients. Note that aluminum will gain or lose about double the dimension of steel when subjected to the same temperature differences.

Strictly speaking, it is the differential expansion between roof panels and structure that must be accommodated by the panels’ attachment clips. The clip (or its base in the case of two-piece clips) is mounted to the structure; panels move differentially to both. An open canopy structure may experience some temperature-induced change in dimension that

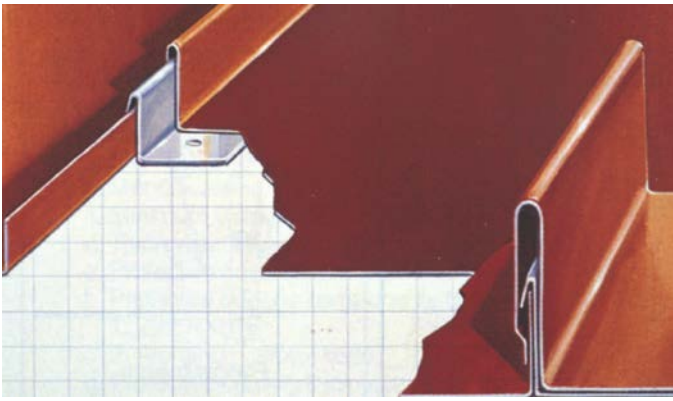

▲ One-piece clip designs provide for thermal cycling by a sliding engagement of the panel seam. The differential movement takes place between panel and clip.

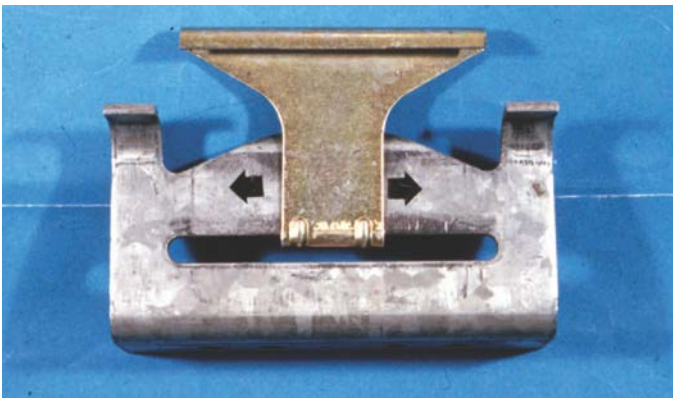

▲ Most two-piece clip designs provide for differential movement within the clip itself. The base is fixed to the structure and the top flange into the panel seam. The top does not move relative to the seam, preserving the integrity of seam sealants.



▲ If a panel is not “fixed” at some location, gravity, or “drag loads,” can pull it down the slope of the roof.

would reduce the differential movement of its roof panels. Most often, however, the structure is a conditioned element inside a shaded or insulated building envelope. When this is the case, it experiences little or no change in temperature and therefore no change in length. This means the differential movement between roof and structure is equal to the total movement of the roof with no offsetting or mitigating thermal cycling of the structure.

Unlike many other aspects of engineering and design, calculations involving anticipated thermal movement are not augmented by factors of safety. In fact, it is not unusual to see as low as 80 percent of this theoretical calculated thermal movement actually used in design. Panels distort a bit; structural mountings or members may be deflected and strained, but roofs don’t seem to fail.

On the other hand, if thermal-movement calculations are based upon ambient air (a frequent and novice mistake), they will often be only 50 percent of the correct extremes, and I have seen such roofs fail—repeatedly. A single metal panel exerts forces measured in tons when it tries to move thermally; hence, undue restriction of this anticipated movement easily can precipitate attachment fatigue and failure.

I have also seen professional engineers who try to prove the panel will undergo a “buckling” failure before the attachment will fail. In other words, it will hump up, oil-can or otherwise move out of plane to relieve the thermal forces. The trouble with this theory is that a member only buckles in compression (during an expansion cycle). Most attachment fatigue and failure occurs in tension (during cold-cycle contraction).

Manufactured two-piece clips usually include some mechanism to ensure they are centered at the time of installation. In theory, the roof panels are installed somewhere in the midrange of their in-service extremes. Although it may not be exactly at the halfway mark, common practice does not compensate for exact temperatures at installation. It

is absurd to suppose that installers will move clips to some predetermined location contingent upon installation temperature. Even if they did, the temperature is likely to be different when the mechanical seaming is done, thus botching the whole theory. Most clips find their own “centering” within the range of thermal cycling of the roof within the first few months of service.

Rob Haddock is president of the Colorado Springs, CO-based Metal Roof Advisory Group Ltd. He is a consultant, technical writer, training curriculum author, inventor and educator. In 2012 he became a charter inductee of Modern Trade's "Metal Construction Hall of Fame" for his many contributions to the industry.

Certain references in this article to third-party publications, including standards, may be outdated. The reader should not rely on the accuracy of such references and should verify the applicability of this information with the local building and fire officials.

Founded in 1983, the Metal Construction Association brings together the diverse metal construction industry for the purpose of expanding the use of all metals used in construction. MCA promotes the benefits of metal in construction through:

- Technical guidance
- Product certification
- Educational and awareness programs
- Advocating for the interests of our industry
- Recognition of industry-achievement awards
- Monitoring of industry issues, such as codes and standards
- Research to develop improved metal construction products
- Promotional and marketing support for the metal construction industry
- Publications to promote use of metal wall and roof products in construction

For more information, please visit the MCA Web site at www.metalconstruction.org

Copyright © 2014 Rob Haddock. All rights reserved. Reprinted with permission.

No part of this publication may be reproduced in any form or by any means, including photocopying, or utilized by any information storage or retrieval system without permission of the copyright owner.

This bulletin is for general information only. The bulletin is designed to delineate areas requiring consideration. Information contained in the bulletin should not be used without first securing competent advice with respect to its suitability for any given application. MCA does not assume responsibility and disclaims any representation or warranty, express or implied, that such information is suitable for any general or particular use. Anyone making use of the bulletin assumes all liability resulting from such use.

The existence of the bulletin does not in any respect preclude a member or nonmember of MCA from manufacturing, selling, or specifying products not conforming to the bulletin, nor does the existence of an MCA bulletin preclude its voluntary use by persons other than MCA members. The bulletin does not purport to address all safety problems associated with its use or all applicable regulatory requirements. It is the responsibility of the user of the guideline to establish appropriate safety and health practices and to determine the applicability of regulatory limitations before use of the bulletin.

The Metal Construction Association reserves the right to change, revise, add to, or delete any data contained in the bulletin without prior notice.

It is the responsibility of the end user to verify the applicability of this information with the local building and fire officials.

© 1/2014

METAL CONSTRUCTION ASSOCIATION

8735 W. Higgins Road, Suite 300, Chicago, IL 60631

847.375.4718 | mca@metalconstruction.org | www.metalconstruction.org

BUILD LEGACIES
 METAL